

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number  
**WO 03/074836 A1**

(51) International Patent Classification?: **E21B 19/00**,  
19/22, 7/128, 47/02

(21) International Application Number: PCT/GB02/00910

(22) International Filing Date: 1 March 2002 (01.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **PHILIP, Head** [GB/GB]; Gibbs House, Kennel  
Ride, Ascot, Berks SL5 7NT (GB).

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,  
SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA,  
ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

**Published:**


— with international search report

(74) Agent: **HILLGATE PATENT SERVICES**; 6 Aztec Row,  
Berners Road, Islington, London N1 0PW (GB).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

(54) Title: CONDUCTOR SYSTEM

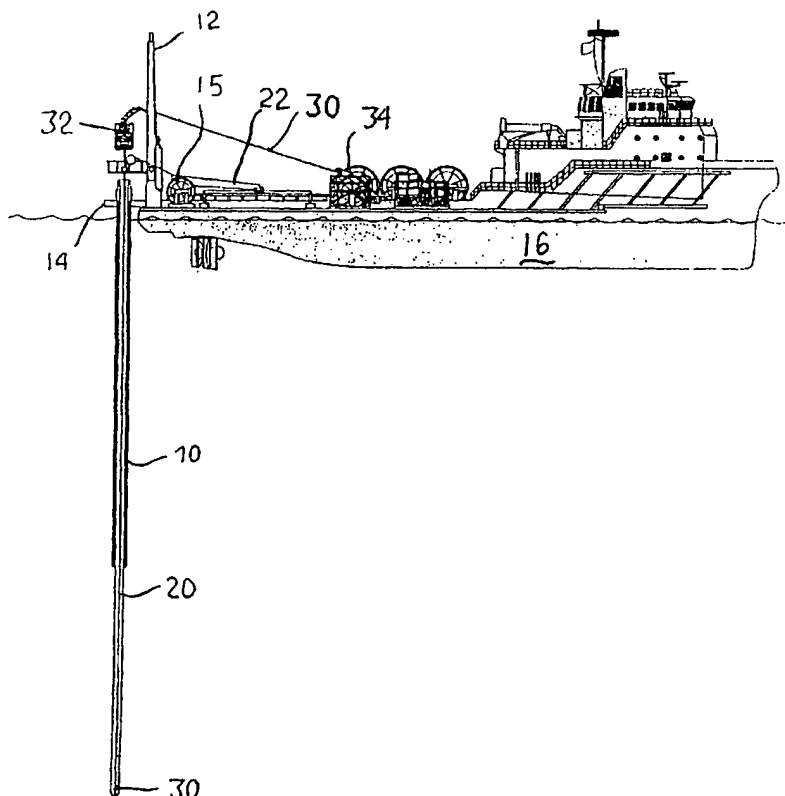

(57) Abstract: A method of installing a conductor (10) or a casing in the sea bed, the conductor (10) or casing being caused to penetrate a sea bed, the conductor or casing being substantially suspended from a length of coiled tubing (30). The conductor or casing being lowered to the sea bed by means of the coiled tubing, the coiled tubing being deployed from a reel on a floating vessel (16). Ideally a conductor may be deployed in the sea bed at the desired location, and subsequently a casing (20) is introduced to the conductor (10). Alternatively the casing is introduced into a conductor, the casing and conductor substantially suspended from a length of coiled tubing, lowered to the sea bed by means of the coiled tubing, and caused to penetrate the sea bed. A length of coiled tubing is then introduced to the conductor or casing.

WO 03/074836 A1

## Conductor System

This invention relates to a conductor system, that is, a system including a well conductor which may be installed in the ground, particularly in off shore environments, for the production of oil and gas and associated tasks.

Well conductors are commonly used when drilling in an off shore environment. A well conductor, usually a steel pipe typically 30 inches (0.76 metres) in diameter, is lowered to the sea bed from a derrick on a rig, and is driven into the sea bed, for example by pre-drilling and/or hammering. Sections may be added to the conductor to extend it. A conductor may be lowered several hundred meters into the ground in this way. Adding new sections to the conductor string is obviously cumbersome and time consuming.

It is an object of the present invention to provide a conductor system that may be installed more easily. Other objects of the invention will become apparent from time to time in the description.

According to the present invention there is provided a method of installing a conductor or a casing in the sea bed, the conductor or casing being caused to penetrate the sea bed, characterised in that the conductor or casing is substantially suspended from a length of coiled tubing, the conductor or casing being lowered to the sea bed by means of the coiled tubing.

Preferably the conductor or casing is a conductor deployed in the sea bed at the desired location, and subsequently a casing is introduced into the conductor

5           Alternatively, a casing is introduced into a conductor, substantially suspended from a length of coiled tubing, lowered to the sea bed by means of the coiled tubing, and caused to penetrate the sea bed. Preferably the length of coiled tubing is introduced to the conductor or casing , and preferably extends along the length of the conductor or casing.

10

The penetration may be effected or assisted by fluid being passed through the length of coiled tubing.

          According to another aspect of the present invention there is provided a  
15   method of installing a well conductor or casing in the sea bed, the conductor or casing being caused to penetrate the sea bed, characterised in that there are included sensor means held in proximity to the conductor or casing, such that the sensor means gather data by which means information regarding the position of the conductor or casing may be calculated.

20

Preferably a casing is introduced into a conductor, substantially suspended from a length of coiled tubing, lowered to the sea bed by means of the coiled tubing, and caused to penetrate the sea bed.

25           The sensor means may comprise one or more sensors including gyroscopes.

The invention will now be described, by way of example, reference being made to the accompanying drawings, in which:

5 Figure 1 shows a side view of the system being deployed,

Figure 2 shows a sectional side view of the system during installation,

Figure 3 shows a cross section of a sensor,

10

Figure 4 shows a sectional side view of another embodiment of the system during installation,

Figure 5 shows a sectional side view of the system after installation,

15

Figure 6 shows a sectional side view of the system after installation and a pilot exploration,

Figure 7 shows a sectional side view of the system immediately prior to use,

20

and

Figure 8 shows a section side view of a further embodiment of the system during installation.

The some of the elements present in the figures are schematically represented, being drawn at a different scale to the other elements, or drawn in a foreshortened manner.

5           Referring to figure 1, a well conductor 10 is suspended from a mast 12 and hang off beam 14 located at one end of a ship 16. The well conductor 10 is typically between 80 - 160 feet (18 - 55 metres). A length of casing 20 is introduced into the conductor 10 from a reel (not here shown). The conductor 10 is moved from its storage area, and the casing 20 moved from its storage  
10   area and introduced to the conductor, by a conductor/casing handling machine 22. The casing 20 is typically 350 – 500 feet long (106.68 - 152.4 metres), and 13 inches (0.34 metres). The casing 20 being longer than the well conductor 10, the majority of its length extends from beneath the lower end of the conductor. The top of the casing 20 is anchored to the top of the conductor 10.  
15   Referring for a moment to figure 2, at the top of the casing is included a wellhead housing 35.

          Referring back to figure 1, the length of coiled tubing 30 is introduced by an injector 32 to the casing 20 from a reel 34. The length of the coiled  
20   tubing 30 is greater than the length of the casing. The thickness of the coiled tubing is typically 3 ½ inches (0.089 metres). When the lower end of the coiled tubing 30 reaches the lower end of the casing 20, the coiled tubing is anchored to the top of the casing by a centraliser 43. The centraliser 43 (visible in figure 2) also spaces the coiled tube centrally inside the casing.

25

Referring to figure 2, the ship 16 is anchored by means of mooring lines (not shown) attached to a number of anchor points 36,37 embedded on the sea bed. The ship may be positioned by adjusting the length and tautness of the mooring lines using the mooring line reels.

5

The conductor 10 is released from the hang off beam 14, and the conductor 10 and casing 20 are lowered by the coiled tubing 30. The coiled tubing 30 is paid out by the injector 32 until its lower end reaches the surface of the sea bed 45. This may be detected by measuring the weight on the coiled tubing, for example. The injector 32 includes heave compensation means so that the coiled tubing system 40 (that is the coiled tubing 30, conductor 10 and casing 20 collectively) is held steadily at the sea bed 45.

Two 'gyro sensors' 42,43 (that is, a sensor containing one or more gyroscopes, and from which orientation may be deduced) are slidably attached to the coiled tubing 30. Referring to figure 3, these sensors 42,43, when considered in section, are approximately annular in form, having a bore 46 through which the coiled tubing 30 may pass. Each sensor is somewhat elongated, with the through bore offset, in order to accommodate the gyroscope and associated circuitry; nevertheless, it is such a size that it may be accommodated within the inner diameter of the coiled tubing. A wireline 48,49 is attached to each sensor, so that it may be raised and lowered to alter its position along the length of the coiled tubing. Referring back to figure 1, the wirelines 48,49 is wound upon a reel 15 for this purpose. Data from the sensors 42,43 are also transmitted along the wireline 48,49 to be analysed on the ship 16. Referring again to figure 2, the upper sensor 43 may thus be

positioned anywhere above the centraliser 34 along the coiled tubing, and the lower sensor 42 may be positioned anywhere below the centraliser 34, so that between them they may provide all the necessary readings by being moved along the length of the coiled tubing.

5

The position of the gyro sensor 42,43 may be determined from its output, in particular giving the inclination of the coiled tubing system 40 from the vertical at a particular point, and the azimuth of the coiled tubing system, the position of the gyro then being calculated by the length of wireline paid  
10 out. The lowest point of the coiled tubing system 40 may be vertically below the vessel 16, but the length of the coiled tubing system bowed. The gyro sensors will also give an indication of this.

Generally, the coiled tubing system 40 will not remain vertical as it is  
15 lowered, but instead become inclined through the action of currents in the sea. It is highly desirable that the coiled tubing system is installed vertically into the sea bed 45. The ship 16 may be repositioned so that the coiled tubing system is vertical, with continuous readings being taken from the gyro sensors. If bowing is occurring, the coiled tubing 30 may be taken up to reduce slack. It  
20 may not be possible to orient the coiled tubing system precisely vertically, and a small inclination may be felt acceptable. The inclination, and the azimuth of the coiled tubing system 40 will be accurately known, whether or not it is decided to reposition the ship. The location of penetration will also be accurately known, as will the path of the bore hole as it is produced, since the  
25 gyro sensors may be continuously employed as the coiled tubing system is advanced.

At the lower end of the casing 20 is a jetting member 50, which includes a central jetting aperture 52 with which the lower end of the coiled tubing 30 engages, and inlet apertures 54 which communicate with the annulus  
5 60 between the outer surface of the coiled tubing 30 and the inner surface 20 of the casing.

To advance the coiled tubing system 40 and produce the bore hole, fluid is pumped down the coiled tubing 30, this fluid being emitted from the lower  
10 end of the coiled tubing as a jet. The jet of fluid erodes the portion of sea bed underneath it into suspended particles, which are carried with the fluid through the inlet apertures 54 of the jetting member, and up through the casing 20. The coiled tubing 30 is meanwhile paid out, and so advances into the bore hole that it is creating.

15

Referring to figure 4, a number of sensors 43 may be spaced equidistantly above the centraliser 34 along the coiled tubing 30. All the sensors 42,43 are connected to a single wireline 48, so that they may be raised or lowered simultaneously. The distance separating the sensors 43 above the  
20 centraliser 34 should ideally be a similar distance to the length of the coiled tubing 30 beneath the centraliser 34, so that the entire length of the coiled tubing may be efficiently covered by the sensors. By using several sensors in this way, the position of the coiled tubing 30 over its entire length may be ascertained more quickly, and its instantaneous position estimated more  
25 accurately.



When the bore hole has been advanced and the conductor 10 and casing 20 installed to a satisfactory depth, the centraliser 34 is removed and the coiled tubing 30 is disconnected from the casing, wound back upon the reel, being withdrawn from the casing 20 to leave the casing 20 and the conductor 10  
5 embedded in the sea bed, and the wellhead housing 55 exposed as shown in figure 5.

Rather than using sensors containing gyroscopes, similar sensors, such as laser gyroscopes or accelerometers, from which the orientation or position  
10 of the coiled tubing system may be calculated, may instead be disposed on the coiled tubing system.

Other sensors could be included in the coiled tubing system, particularly upon the coiled tubing. In this manner, further data about the drilling  
15 environment such as coil or rock type, shallow gas, and shallow water flow, so that details of the well design, such as the casing design and the drill type, may be tailored to the site.

Once the casing 20 and conductor 10 have been installed to the correct  
20 depth, the centraliser 43 and jetting member 50 could be released from the casing to free the coiled tube 30, and then the coiled tubing could be advanced further into the ground to bore a pilot hole 56 shown in figure 6, and collect further data on the on the environment beneath the sea bed.

25 Referring to figure 7, since the exact position of the wellhead housing 55 is known, a rig 70 may be moored to the previously installed anchor points

36,37, and accurately position vertically above the conductor 10, casing 20 and wellhead housing 55 by adjusting the length and tautness of the mooring lines 72,73. A riser and/or drill string 80 may now be lowered to meet and enter the casing.

5

The principles of the invention disclosed herein could be adapted for different components. Referring to figure 8, the a casing pipe 20 (without a conductor) is suspended from an introduced length of coiled tubing 30 and lowered and installed in the sea bed 45, the casing pipe 20 here terminating in  
10 a wellhead housing 55 assembly that is sufficiently robust to not require a conductor. If desired, additional support and guide base means may be added later.

In a similar manner, a length of coiled tubing could be introduced and  
15 attached to a conductor pipe (with no casing being included), the conductor being lowered on the coiled tubing and embedded in the ground in a similar manner to that described above. A separate casing means and wellhead housing may then be installed in a later step. Additional components and casings could of course be included.

20

Position transducers, guide lines, or other locating means for allowing a vessel returning after having installed the conductor and casing, or having installed only a conductor, or only a casing, may be included iwith the installed components to help the returning vessel locate and access the installation.  
25 These locating means may be used additionally or alternatively to the gro sensors disclosed above.

Other soil penetration means, such as electrically powered or fluid powered drill bits, could be used with the coiled tubing, or used in addition to the fluid jetting described above.

5

## CLAIMS

1. A method of installing a conductor or a casing in the sea bed, the conductor or casing being caused to penetrate a sea bed, characterised in that  
5 the conductor or casing is substantially suspended from a length of coiled tubing, the conductor or casing being lowered to the sea bed by means of the coiled tubing, the coiled tubing being deployed from a reel on a floating vessel.
2. A method according to claim 1, characterised in that the conductor or  
10 casing is a conductor deployed in the sea bed at the desired location, and subsequently a casing is introduced into the conductor.
3. A method according to claim 1, characterised in that a casing is  
15 introduced into a conductor, the casing and conductor substantially suspended from a length of coiled tubing, lowered to the sea bed by means of the coiled tubing, and caused to penetrate the sea bed.
4. A method according to any previous claim, characterised in that the  
20 length of coiled tubing is introduced to the conductor or casing .
5. A method according to any previous claim, characterised in that the  
length of coiled tubing is introduced to extend along the length of the  
conductor or casing .

6. A method according to any previous claim, characterised in that the penetration is effected or assisted by fluid being passed through the length of coiled tubing.
- 5 7. A method according to claim 6, characterised in that the fluid passes through the annulus between the coiled tubing and conductor or casing in the opposite direction to the direction of flow through the coiled tubing.
8. A method according to any previous claim, characterised in that the  
10 coiled tubing is disconnected from the conductor or casing after the conductor or casing have been embedded in the sea bed.
9. A method of installing a well conductor or casing in a sea bed, the conductor or casing being caused to penetrate the sea bed, characterised in that  
15 there are included sensor means held in proximity to the conductor or casing, such that the sensor means gather data by which means information regarding the position of the conductor or casing may be calculated.
10. A method according to claim 9, characterised in that a casing is  
20 introduced into a conductor, substantially suspended from a length of coiled tubing, lowered to the sea bed by means of the coiled tubing, and caused to penetrate the sea bed, the coiled tubing being deployed from a reel on a floating vessel.
- 25 11. A method according to either claim 9 or claim 10, characterised in that the sensor means comprises one or more sensors including gyroscopes.

12. A method according to any of claims 9 to 11 characterised in that the sensor means are moveable relative to the conductor and/or casing along at least part of the length of the conductor and/or casing.

5

13. A method according to any of claims 9 to 12 characterised in that a length of coiled tubing is introduced to the casing and the sensor means are deployed on the coiled tubing.

10 14. A coiled tubing system comprising a conductor and/or casing and length of coiled tubing according to any previous claim.

1/6



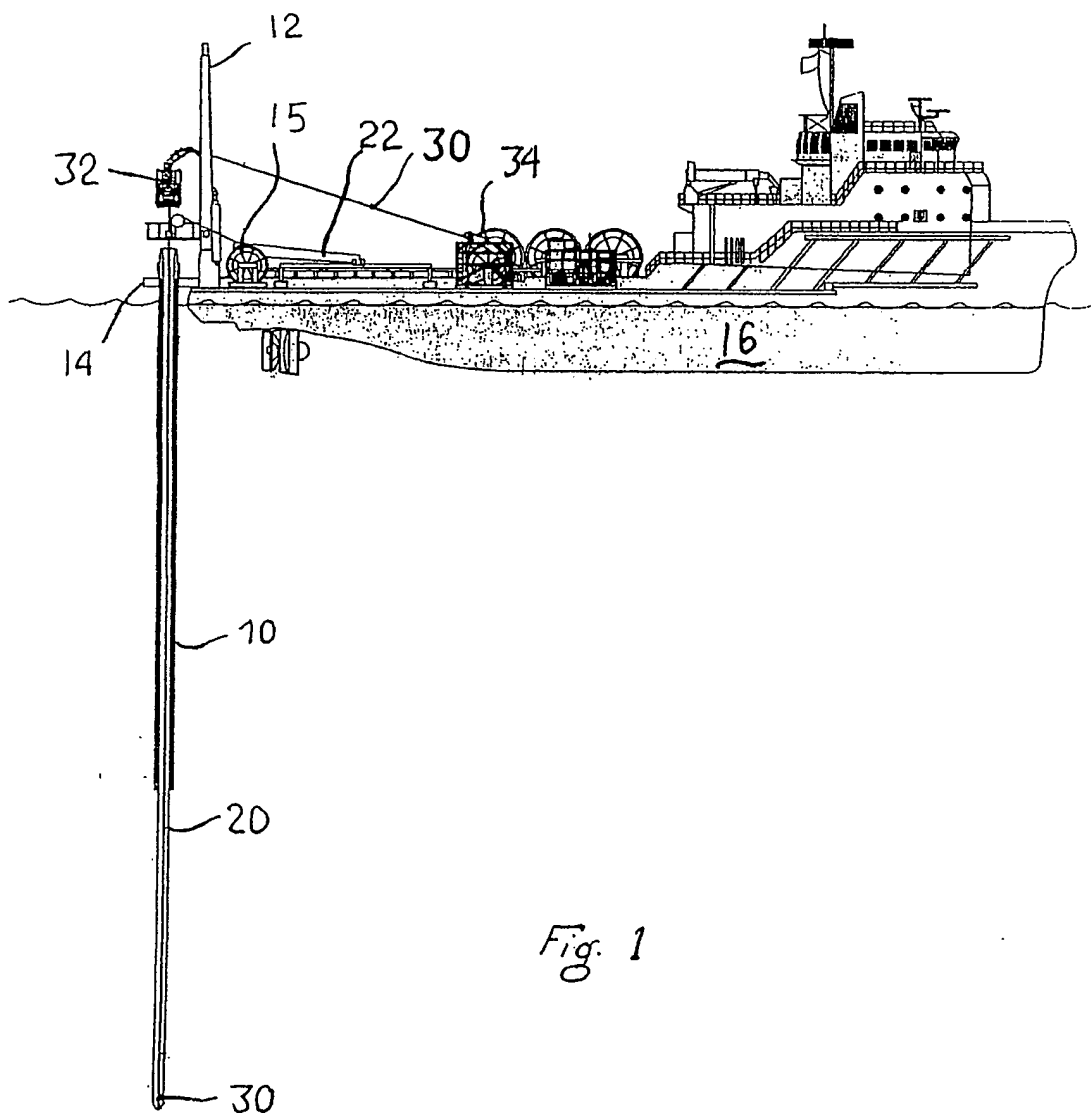



Fig. 1

2/6





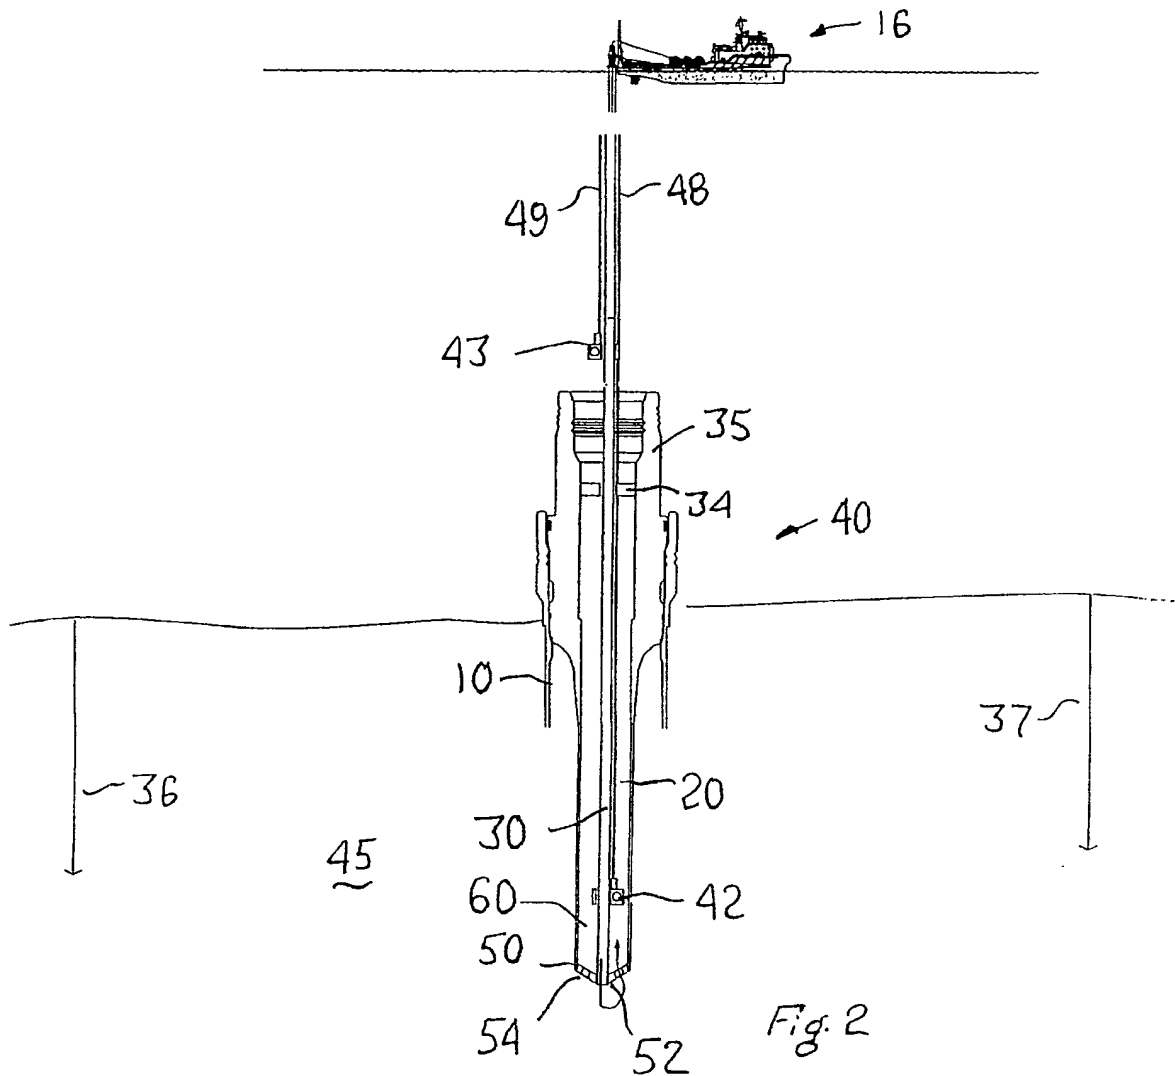


3/6

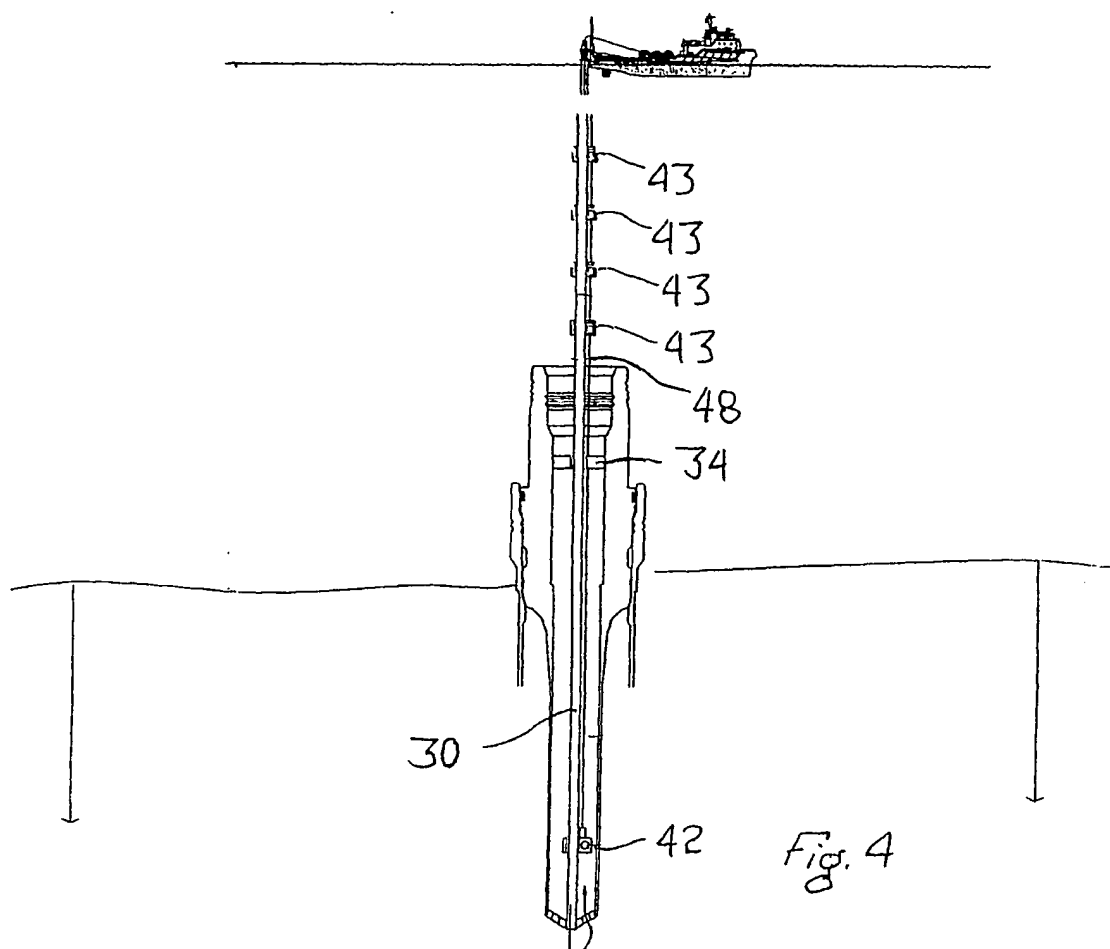

4/6

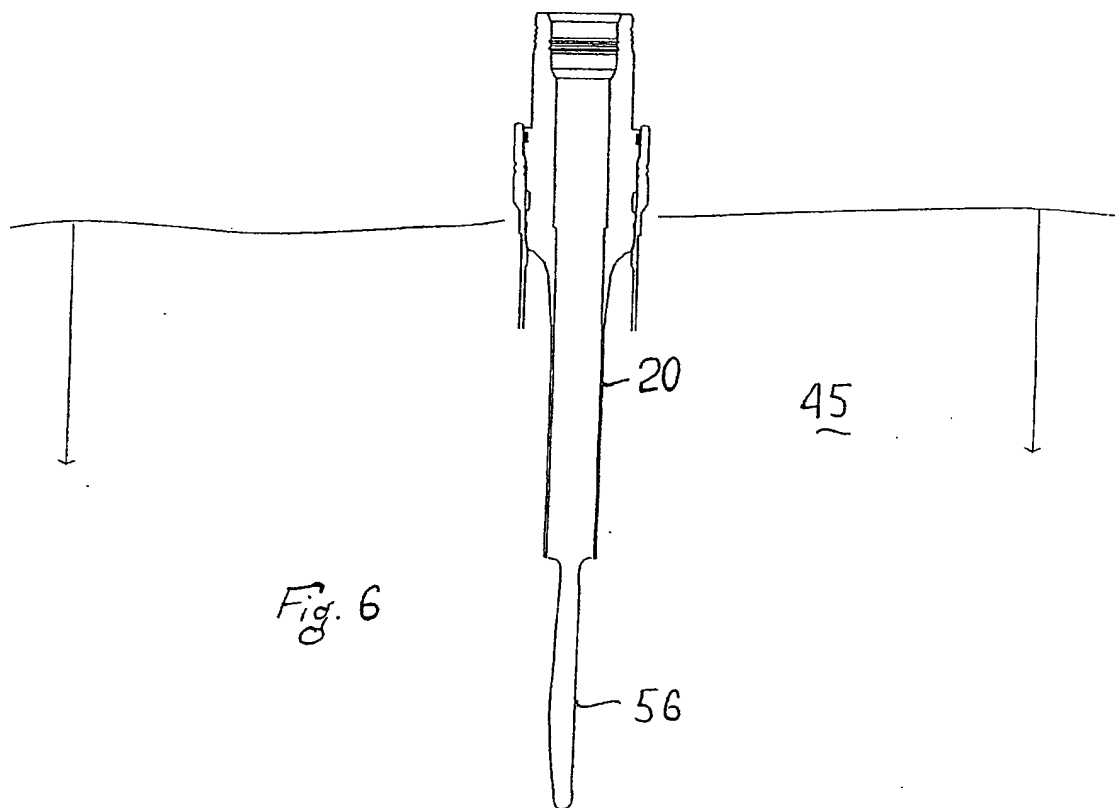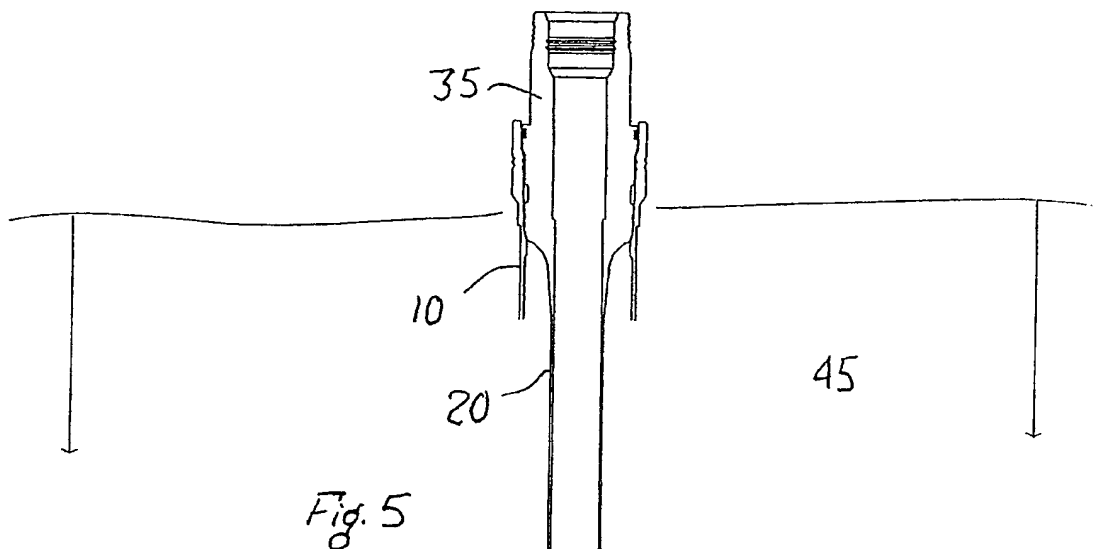

5/6

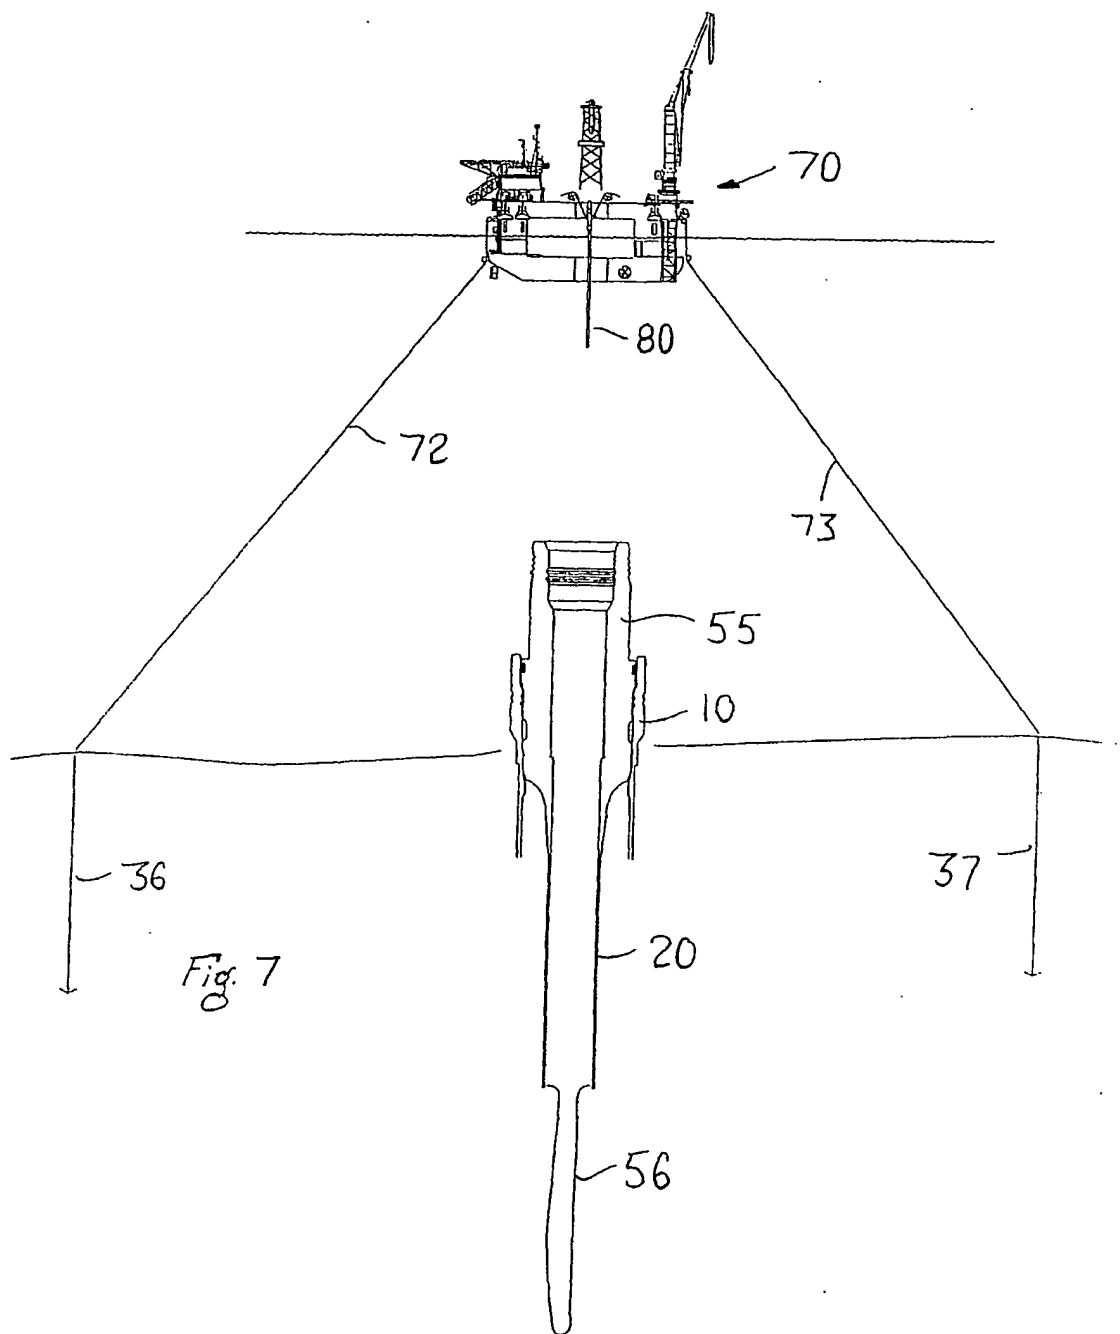

6/6

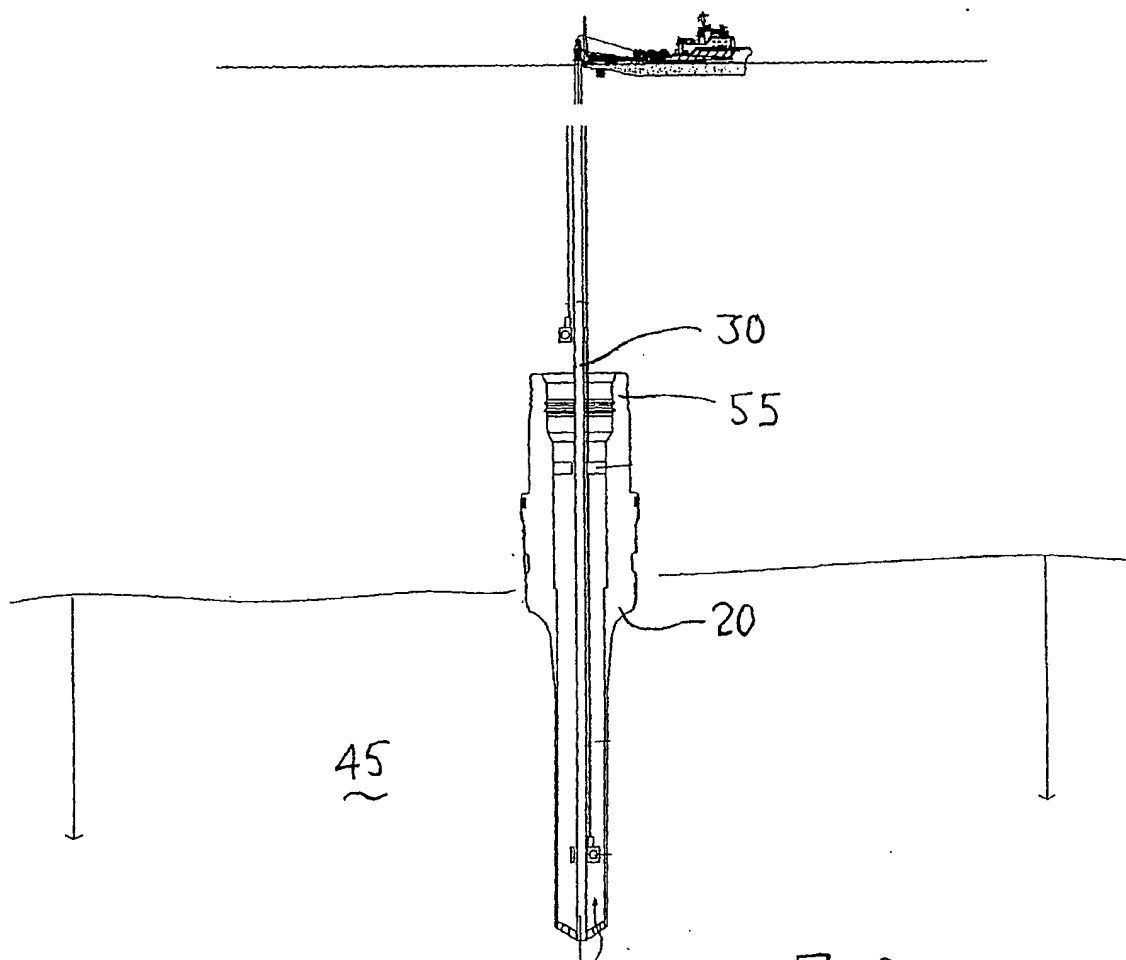


Fig. 8

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 02/00910

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 E21B19/00 E21B19/22 E21B7/128 E21B47/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 349 660 A (WS ATKINS CONSULTANTS LTD ;XL TECHNOLOGY LTD (GB)) 8 November 2000 (2000-11-08)	1,4,5, 8-10,13, 14
Y	page 6, line 1-8; figures page 7, line 26 -page 8, line 7 page 10, line 14 -page 11, line 10 ---	2,6,7
Y	US 3 782 460 A (SKINNER D) 1 January 1974 (1974-01-01) column 3, line 27 - line 67; figures ---	2,6,7
A	EP 0 499 737 A (MCDERMOTT INT INC) 26 August 1992 (1992-08-26) abstract; figures --- -/--	1,9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the International search

11 July 2002

Date of mailing of the International search report

18/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Weiland, T

## INTERNATIONAL SEARCH REPORT

Internat	Application No
PCT/GB 02/00910	

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	GB 2 358 036 A (ROBERTS BILLY JAMES ;STRONG WILLIAM HAROLD (US)) 11 July 2001 (2001-07-11) abstract; figures -----	1,9

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/GB 02/00910

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-8,14

Method of installing a conductor by using coiled tubing

2. Claims: 9-13

Method of installing a conductor with means to gather data regarding the position of the conductor.



## INTERNATIONAL SEARCH REPORT

Information on patent family members

Internal Application No

PCT/GB 02/00910

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2349660	A	08-11-2000	NONE	
US 3782460	A	01-01-1974	GB 1361296 A	24-07-1974
			AU 467000 B	13-11-1975
			AU 4584772 A	28-02-1974
			CA 967143 A1	06-05-1975
			FR 2150425 A1	06-04-1973
			IT 964976 B	31-01-1974
			JP 48030602 A	23-04-1973
			JP 55007516 B	26-02-1980
			OA 4157 A	15-12-1979
EP 0499737	A	26-08-1992	US 5060731 A	29-10-1991
			AT 118595 T	15-03-1995
			AU 635678 B2	25-03-1993
			AU 1105892 A	27-08-1992
			BR 9104098 A	27-10-1992
			CA 2058789 A1	23-08-1992
			CN 1064337 A , B	09-09-1992
			DE 69107440 D1	23-03-1995
			DE 69107440 T2	14-06-1995
			DK 499737 T3	10-04-1995
			EP 0499737 A1	26-08-1992
			ES 2068519 T3	16-04-1995
			GR 3015951 T3	31-07-1995
			MX 9102594 A1	01-08-1992
			NO 302134 B1	26-01-1998
GB 2358036	A	11-07-2001	US 2001030045 A1	18-10-2001

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**